

HDMI CAPTURE CARDS

Raptor Series



Osprey 944 – 4 Channels HDMI PCIe

- 2x HDMI 1.4 (4K30) plus 2x HDMI 1.3 (1080p60)
- 8 Embedded Audio Channels per Input

Osprey 924 – 2 Channels HDMI PCIe

- 2x HDMI 1.4 (4K30)
- 8 Embedded Audio Channels per Input

Osprey 914 – 1 Channel HDMI PCIe

- HDMI 1.4 (4K30)
- 8 Embedded Audio Channels per Input

Osprey 927 – 2 Channels: 3G-SDI | HDMI1.4

- 16 Embedded SDI Audio Channels
- 8 Embedded HDMI Audio Channels
- Balanced and Unbalanced Analog Audio

Osprey 1224 – 2 Channels HDMI PCIe

- 2x HDMI 2.0 (4K60)
- 8 Embedded Audio Channels per Input

Osprey 1214 – 1 Channel HDMI PCIe

- HDMI 2.0 (4K60)
- 8 Embedded Audio Channels per Input



FRAME RATE CONVERSION



SCALING




DE-INTERLACING



WINDOWS



LINUX



TEXT OVERLAY WATERMARKING



SimulStream®, a standard feature on all SDI models, is an Osprey feature which allows each input to produce multiple parallel output streams with completely independent settings for color space, cropping, scaling, closed caption and overlays facilitating simultaneous delivery to multiple applications.



Osprey Rugged

914, 924, 927 are available in a RUGGED Version:

- Passive Cooling
- Extended Temperature Range of 0°C to 60°C
- Coating for high humidity / outdoor applications
- Extended 3yr Warranty




Osprey® 924

Video capture card



Model:
95-00505 Osprey 924

Technical Specifications

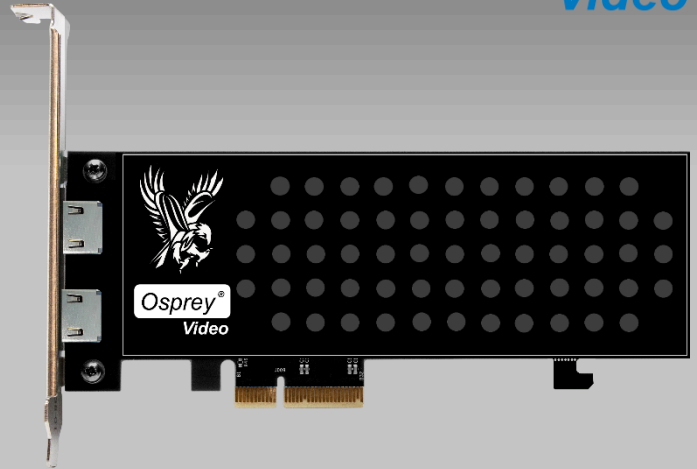

Description

- Two channels HDMI1.4 (4K30)

PCI Format

- PCI Express Gen2 (x 4):
- Slots: x4, x 8, or x 16

Video Connectors

- Full Size HDMI x2 (Type A)

Video Modes

- UHD 3840x2160p 23.98, 24, 25, 29.97, 30
- DCI 4096x2160p 23.98, 24
- 1080i 50, 59.94, 60
- 1080p 23.98, 24, 25, 29.97, 30, 50, 59.94, 60
- 720p 50, 59.94, 60
- 576p, 480p

PC Video Standards

- 1920x1200, 1600x1200, 1400x1050, 1200x1024
1280x960, 1360x768, 1280x768, 1024x768
800x600, 640x480

Audio

- 4 Embedded Stereo Pairs for each HDMI input

Dimensions

- 6.60" L x 2.71" H (16.76cm L x 6.88cm H)
- Full Height

In the Box

- Capture Card with Full Height Bracket
- Half Height Bracket

Weight

- ~ 146 g

Power Consumption

- ~ 4.8 W

Temperature Range

- 0 to 40C Operating Temperature
- -40 to 75C Non-Operating Temperature

Humidity Range (non-condensing)

- Between 5% and 80% Operating
- 95% RH, gradient 30% per hour Non-Operating

Altitude Range

- 0 to 3,048m (10,000ft) Operating
- 0 to 15,240m (50,000ft) Non-Operating