

# RMS7023N/RMD7023N





## Overview

RMS7023N/RMD7023N is a 7.0", 3RU dual-screen rack-mountable LCD monitor with analog composite and 3G/HD/SD-SDI video interface. The features of audio level meter display and full feature waveform/Vector display make RMS7023N/RMD7023N the best choice for OB Van and EFP application.

## Function

- ◆ Multiple format signal input
- ◆ Various Markers  
(Area Marker, Safe Marker and Center Marker)
- ◆ Color temperature adjustment (D93, D65, D56, D50, D32)
- ◆ Various color gamut modes
- ◆ The waveform/vector can be displayed in full screen
- ◆ Time Code Display (VITC, LTC, D-VITC)
- ◆ Support TSL protocol and dynamic UMD
- ◆ Internal network control and firmware update

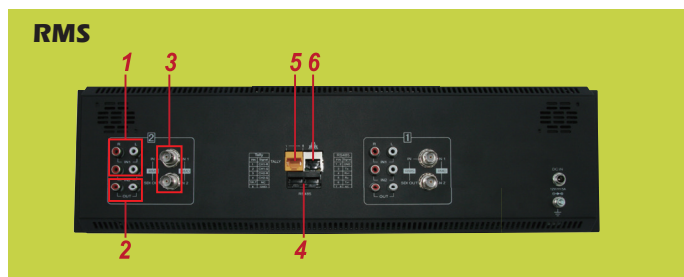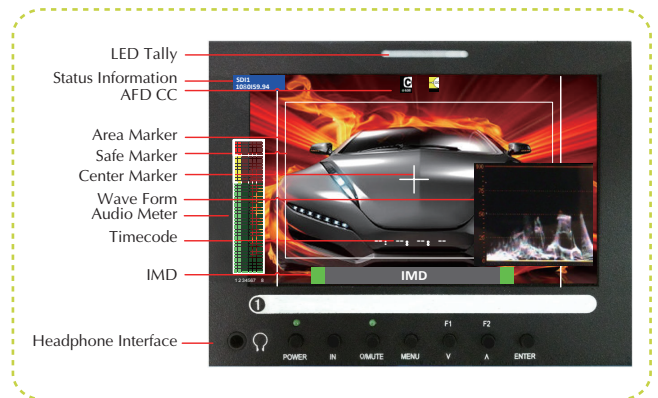

- 1. Analog Audio Input
- 2. Analog Audio Output
- 3. (RMS) Video Input / Output Terminal  
(RMD) Video Input Terminal
- 4. IN / OUT RS485
- 5. Tally Trigger Terminal
- 6. Ethernet Terminal



- 1: Power On/Off Switch
- 2: Input Select
- 3: Mute
- 4: MENU
- 5/6: Function Keys
- 7: Enter
- 8: HEADPHONE Jack

# Specifications

MODEL	RMS7023N		RMD7023N
Number of Screen	2		
Display Area	7.0" diagonal		
Viewing Angle	170°H×170°V		
Color Depth	16.7M		
Resolution	1024×600		
Contrast	800:1		
Brightness	350cd/m <sup>2</sup>		
Temperature	0° C to35° C, Recommended: 20° C to30° C		
Dimension	19.0"W×5.19"H×2.67"D (484mm×132mm×68mm)		
Power Consumption	12VDC/5A		
Signal Format	PAL, NTSC		
	480i59.94,576i50;		
	SMPTE-274	1080i50,59.94,60;1080P/PsF23.98,24,25, 29.97,30; 1080p:50,59.94,60	
	SMPTE- 296	720p:23.98,24,25,29.97,30,50,59.94,60	
	SMPTE- 260	1035i:59.94,60	
Input (Single Screen)	HD/SD-SDI/analog composite(BNC×1), analog stereo(RCA×4)	HD/SD-SDI/analog composite (BNC×2), analog stereo (RCA×4)	
Output (Single Screen)	HD/SD-SDI/analog composite (BNC×1), analog stereo(RCA×2)	analog stereo (RCA×2)	
Accessories	AC power cord / DC adapter		

Specifications are subject to change without notice.

# Dimensions

