LILLIPUT®

Integrated 7" HDMI touch monitor for variety of field applications

779

MODEL NO.:

7"

Capacitive Touch
HDMI Monitor

HDMI DVI & VGA | 1000 NIT HIGH BRIGHTNESS | TOUCH 10-Points

1000 cd/m² High Brightness

779 features with 1000 cd/m² brightness sreen, is able to see more details in the sunshine. Avoid carrying a big sunshade cover, save more space and provide a good horizon.

I/O
Control Interface

The interface has functions such as connecting with reverse trigger line in car reversing system, and control computer host to switch on/off, etc. Functions also can customized to meet different demands.

LUX
Auto Brightness (optional)

A light sensor designed to detect ambient lighting conditions adjusts the panel's brightness automatically, which makes viewing more conveniently & saves more power.

Brackets (optional)

Compatible with 1/4 inch screw hole desktop stand and VESA 75mm collapsible brackets

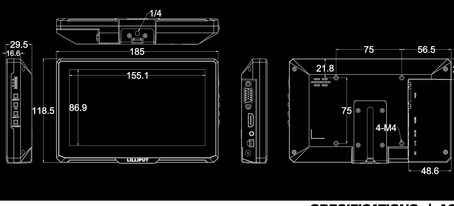

SPECIFICATIONS | ACCESSORIES

DISPLAY	Display Screen	7" LED backlit
	Touch Panel	Capacitive (support OS: Windows 7 or above, optional)
	Physical Resolution	800×480
	Aspect Ratio	16:9
	Brightness	1000cd/m2
	Contrast	500:1
	Viewing Angle	120°/140°(H/V)
INPUT	HDMI	1
	VGA	1
	DVI	1 (optional)
	I/O	1
AUDIO	Composite	1
	Speaker	1
	Ear Jack	1
POWER	Current	0.6A(12V)
	Input Voltage	DC 7-24V
	Power Consumption	≤6.5W
ENVIRONMENT	Operating Temperature	-20℃~60℃
	Storage Temperature	-30℃~70℃
DIMENSION	Dimension(LWD)	185mm × 118.5mm × 29.5mm
	Weight	415g

Note: Due to constant effort to improve products and product features, specifications may change without notice.

www.lilliput.com

ZHANGZHOU LILLIPUT ELECTRONIC TECHNOLOGY CO., LTD.
Add: Lan Tian Economic Development Zone, Zhang Zhou, Fu Jian, 363000, China
Tel: +86-596-2109661/2109323 Fax: +86-596-2109611 Email: sales@lilliput.com