

LILLIPUT®

5" TOUCH SCREEN

# LIVESTREAMING ON-CAMERA MONITOR

## T5U




- 5 inch IPS screen with 1920x1080 resolution, capacitive touch screen
- 4K HDMI 2.0 input, supporting up to 4K 60 Hz
- Output to USB for live streaming
- Wide color space supporting 98% DCI-P3, HDR, 3D-LUT
- Dual-purpose battery plate: Sony NP-F, Canon LP-E6; DC 8V output




## Workflow for live streaming

Build up a professional live streaming location with minimal equipments. It's easy to live stream anytime and anywhere.

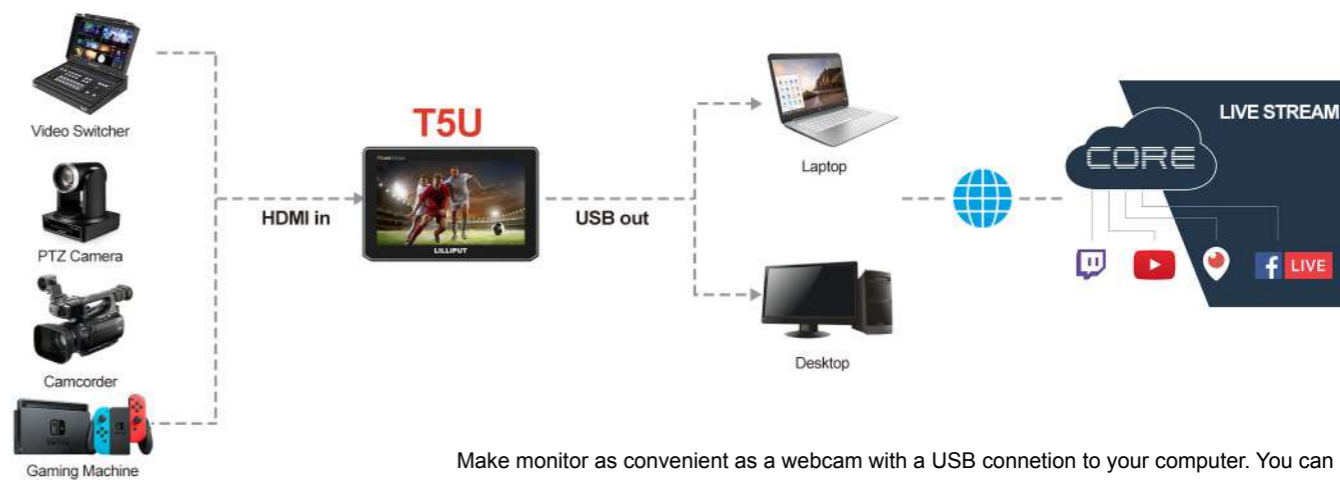

Make monitor as convenient as a webcam with a USB connection to your computer. You can put the video what you are recording directly into the video software for live streaming. Video software will recognize the monitor as a webcam, and any software can be chosen, such as Skype, Facebook, Youtube, Twitch, Periscope, Zoom and more.

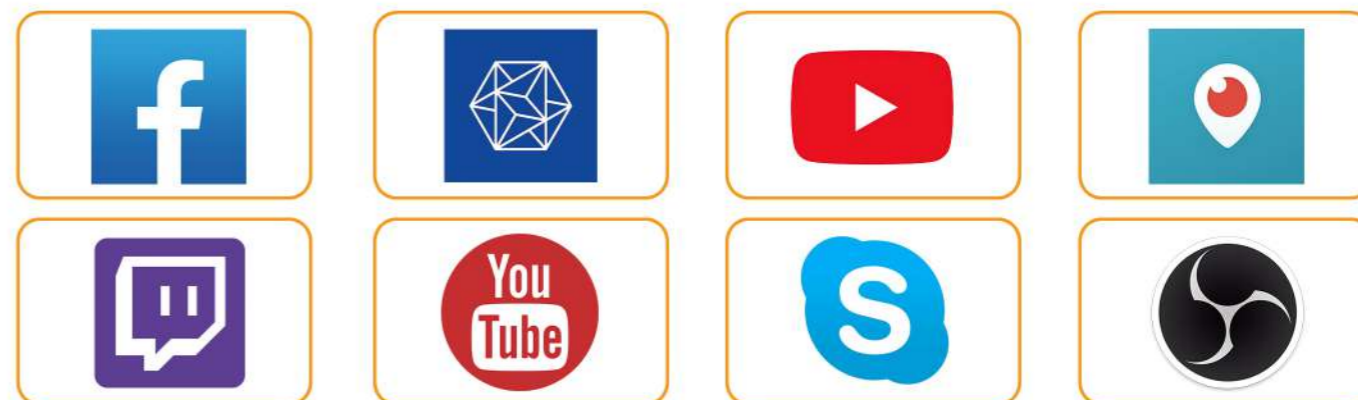



# Penetratingly Minute



Creatively integrated 1920×1080 native resolution (441ppi), 1000:1 contrast, and 400cd/m<sup>2</sup> into a 5 inch LCD panel, which covers 131% Rec.709 and 98% DCI-P3 color space.

# 4K 60Hz HDMI 2.0

HDMI 2.0 supports 4096×2160 60p/50p/30p/25p and 3840×2160 60p/50p/30p/25p.



## HDR / 3D-LUT

Support ST2084 300/1000/10000/HLG; Built-in 3D-LUT, featuring 17 default logs and 6 user logs.



## Capacitive Touch

Quickly select the function on or off from the menu, or slide freely to adjust the value.




## Power Supply

The dual battery mounting plate is compatible with both Canon LP-E6 and Sony NP-F series batteries, and the DC 8V power output is also useful for unlimited purposes.



<b>DISPLAY</b>	Panel	5" IPS
	Touch Screen	Capacitive
	Physical Resolution	1920×1080
	Aspect Ratio	16:9
	Brightness	400cd/m <sup>2</sup>
	Contrast	1000:1
	Viewing Angle	170° / 170°(H/V)
	HDR	ST 2084 300/1000/10000 / HLG
	Supported Log Formats	Slog2 / Slog3, Arrilog, Clog, Jlog, Vlog, Nlog or User...
	LUT support	3D LUT (.cube format)
<b>VIDEO INPUT</b>	HDMI	1×HDMI2.0
<b>SUPPORTED FORMATS</b>	HDMI	2160p 24/25/30/50/60, 1080p 24/25/30/50/60, 1080i 50/60, 720p 50/60...
<b>AUDIO IN/OUT (48kHz PCM Audio)</b>	HDMI	8ch 24-bit
	Ear Jack	3.5mm - 2ch 48kHz 24-bit
<b>POWER</b>	Input Voltage	DC 7-24V
	Power Consumption	≤7W / ≤17W (DC 8V power output in operation)
	Compatible Batteries	Canon LP-E6 & Sony F-series
	Power Output	DC 8V
<b>ENVIRONMENT</b>	Operating Temperature	0°C~50°C
	Storage Temperature	-10°C~60°C
<b>OTHER</b>	Dimension(LWD)	132×86×18.5mm
	Weight	190g
	USB	1×USB2.0
<b>FORMATS FOR LIVE STREAMING</b>	USB	1920×1200, 1920×1080, 1680×1050, 1600×1200, 1440×900, 1368×768, 1280×1024, 1280×960, 1280×800, 1280×720, 1024×768, 1024×576, 960×540, 856×480, 800×600, 768×576, 720×576, 720×480, 640×480, 640×360
	Support OS	Windows 7/8/10, Linux (Kernel version 2.6.38 and above), macOS (10.8 and above)
	Software Compatibility	OBS studio, Skype, ZOOM, Teams, GoogleMeet, YoutubeLive, QuickTime Player, Facetime, Wirecast, CAMTASIA, Ecamm.live, Twitch.tv, Potplayer, etc.
	Compatible SDK	DirectShow (Windows), DirectSound (Windows)

Standard Accessories

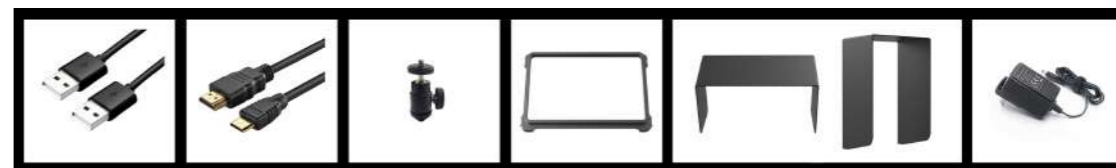

USB A-A Cable

HDMI A-C Cable

Mini Hot Shoe

Frame of Sunshade

Sunshade (H/V)

DC Power Adapter (Optional)

