LILLIPUT® **8.9"** 4K Camera-top Monitor with 1920×1200 Native Resolution

A Better Camera Mate

A8/A8S, matches with world-famous 4K/FHD camera brands, to assist cameraman in better photography experience.

8bit Full HD Display

- 8.9" 16:10 8bit IPS LCD panel with 1920×1200 native resolution, enjoy sharper, more detailed image with richer colors than ever before.
- 800:1 high contrast, 350cd/m² high brightness and 170° wide viewing angles, for excellent viewing experience.

4K HDMI / 3G-SDI Input & Loop Output

- SDI format supports 3G-SDI signal. 4K HDMI format supports 4096×2160 24p / 3840×2160 (23/24/25/29/30p).
- HDMI / SDI signal can loop output to the other monitor or device when HDMI / SDI signal input to A8/A8S.

3D LUT

Wider color gamut range to make precise color reproduction of Rec. 709 color space with built-in 3D LUT, featuring 8 default logs and 6 user logs.

8 DEFAULT LOGS

- SLog2ToLC-709
- SLog2ToLC-709TA
- SLog2ToSLog2-709
- SLog2ToCine+709
- SLog3ToLC-709
- SLog3ToLC-709TA
- SLog3ToLC-709
- SLog3ToCine+709

3D LUT LOAD

Supports loading the .cube file via USB flash disk.

PEAKING FILTER



ASPECT MARKER

AUDIO LEVEL METER / HISTOGRAM

Camera Auxiliary Functions

A8/A8S provides plenty of auxiliary functions for taking photos and making movies, such as peaking, false color and audio level meter.

Peaking | False color | Histogram | Exposure | Level meter | Image flip | Fix to pin | Grid | Check field | Zoom | Underscan | Image freeze | Aspect ratio | Center marker | Screen marker

Portable Design

Compact and light-weight body, which make great convenient for cameraman in outdoor environment.

Sony F970 Battery Plate

- Providing 3-4 hours working time for cameraman in shooting applications.

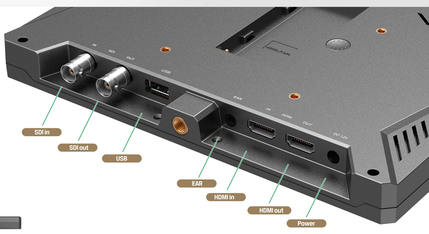

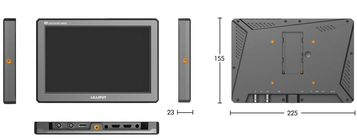

Easy-to-use

F1&F2 user-definable buttons to custom auxiliary functions as shortcut, such as peaking, underscan and checkfield. Use the arrow buttons to select and adjust the value among of sharpness, saturation, tint and volume, etc.
75mm VESA and hot shoe mounts to fix A8/A8S on the top of camera or camcorder.
Note: EXT/F2 button(A8S): the F2 shortcut function is available under non menu interface; the EXT function is available under menu interface.

SPECIFICATIONS | ACCESSORIES

DISPLAY	Display Screen	8.9" 8bit IPS
	Physical Resolution	1920×1200
	Aspect Ratio	16:10
	Brightness	350cd/m²
	Contrast	800:1
	Viewing Angle	170°(170°)(H/V)
INPUT	HDMI 1.4	1
	3G-SDI	1 (A8S)
OUTPUT	HDMI 1.4	1
	3G-SDI	1 (A8S)
AUDIO	Speaker	1
	Ear Phone Jack	1
POWER	Current	1A (12V)
	Input Voltage	DC 7-24V
	Battery Plate	F970
	Power Consumption	≤10W
ENVIRONMENT	Operating Temperature	0℃~50℃
	Storage Temperature	-10℃~60℃
DIMENSION	Dimension (LWD)	225×155×23mm
	Weight	535g
HDMI FORMAT	4K HDMI	4096×2160 24p / 3840×2160 (23/24/25/29/30p)

Note: Due to constant effort to improve products and product features, specifications may change without notice.

www.lilliput.com

ZHANGZHOU LILLIPUT ELECTRONIC TECHNOLOGY CO., LTD.
Add : Zong Si Road. Lan Tian Economic Development Zone, Zhang Zhou, Fu Jian, 363005, China
Tel: +86-596-2109661/2109323 Fax: +86-596-2109611 Email: sales@lilliput.com