

## 15.6" 4K Ultra HD LCD Monitor

# UH1560

- 15.6 inch native 4K Ultra HD IPS panel
- Dual HDMI 2.0 and dual HDMI 1.4 inputs support
- Support Digital and Analog inputs
- Multi-View and PIP
- Versatile Functions for Broadcasting Applications
- Adaptable Various Installation Methods
- Slim Design with Mounting Threads
- 2 Way Power Supply Support
- Stepless Adjustable Stand with A Low Center-Of-Gravity
- Complies with Kensington Security Slot
- Optional Accessories for Wide Range of Applications



## Introduction


The UH1560 features a 15.6 inch native 4K Ultra HD, 3840x2160 resolution IPS panel with a brightness of 330 cd/m<sup>2</sup>, view angle of 176° (vertically and horizontally), and a contrast ratio of 1000:1. The UH1560 is equipped with dual HDMI 2.0 supporting Ultra HD content at 60Hz, dual HDMI 1.4, Displayport 1.2 and analog VGA inputs. UH1560 is also compliant with the latest HDCP 2.2 protocol as well as HDCP 1.4.

The UH1560 lets you view selected input data from up to 4 input sources at once, including selections of “4P (4 pictures at once)” , “2P LR (2 pictures on left and right)” , “2P TB (2 pictures on top and bottom)” and “PIP (Picture-In-Picture)” . The UH1560 also provides versatile functions for video production and broadcasting applications, including Safety Marker, Pixel-by-Pixel and Check Field with four color mode. The UH1560 has a thickness of 36mm with four 1/4-inch screw holes on top and bottom, left and right edges to mount on a tripod, an arm or a clamp, and is also attached with a removable, low CG, stepless adjustable stand. The stand can be collapsed to a compact size for convenience. Removing the stand reveals thread holes compatible with FPMPMI 75x75 and 100x100mm VESA mounts. Furthermore, A slot compliant with Kensington Security Slot is built-in to the rear bottom corner of the UH1560. Various installation methods are provided by functions such as Display Rotation, Image Mirror, and also Button Lock for mischief prevention.

The UH1560 provides AC/DC and battery driven with DC and mini 4 pin XLR connector. V-mount battery plate is mountable directly to the back of the monitor. The additional U-type stand, attachable sunshade and 19-inch rack mount (6U) brackets are available to meet the wide range of applications.

## 15.6 inch native 4K Ultra HD IPS panel

The UH1560 features a 15.6-inch native 4K Ultra HD, 3840x2160 resolution IPS panel with a brightness of 330 cd/m<sup>2</sup>, view angle of 176° (vertically and horizontally), and a contrast ratio of 1000:1.

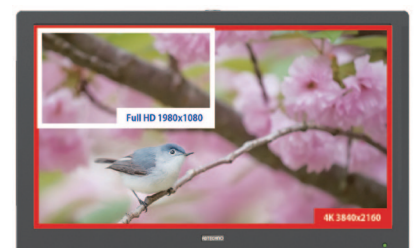

## Dual HDMI 2.0 and dual HDMI 1.4 inputs support

The UH1560 is equipped with dual HDMI 2.0 supporting 4K Ultra HD signal at 60Hz, compliant with the latest HDCP 2.2 protocol as well as HDCP 1.4 that enables watching copyright-protected content such as Blu-ray. Another dual HDMI 1.4 with HDCP 1.4 is also available for multi-signal inputs support.



## Adaptable Various Installation Methods

Various installation methods are provided by functions such as Display Rotation, Image Mirror, and also Button Lock for mischief prevention.



## Support Digital and Analog inputs

The UH1560 is also equipped with Displayport 1.2 and Analog VGA inputs to meet the wide range of applications.



## Slim Design with Mounting Threads

The UH1560 has a thickness of 36mm with four 1/4-inch screw holes on top and bottom, left and right edges to mount on a tripod, an arm or a clamp.



## Multi-View and PIP

The UH1560 lets you view selected input data from up to 4 input sources at once, including selections of "4P (4 pictures at once)" , "2P LR (2 pictures on left and right)" , "2P TB (2 pictures on top and bottom)" PIP (Picture-In-Picture)" .




## 2 Way Power Supply Support

The UH1560 provides AC/DC and battery driven with DC and mini 4 pin XLR connector. An optional V-mount battery plate, UH15-VMP is mountable directly to the back of the monitor.



## Versatile Functions for Broadcasting Applications

UH1560 provides versatile functions for video production and broadcasting applications, including Safety Marker, Pixel-by-Pixel and Check Field with four color mode.

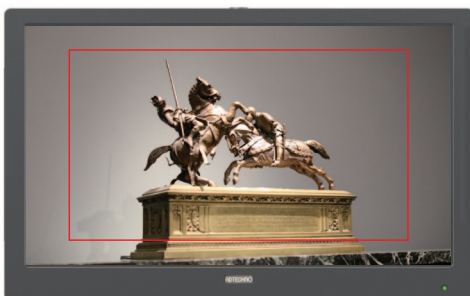

## Stepless Adjustable Stand with A Low Center-Of-Gravity

The UH1560 is attached with a removable, low CG, stepless adjustable stand which enables bending and stretching to an ideal angle of your monitor installation. The rear side the stand also includes wall-mount hooks. Removing the stand reveals thread holes compatible with FPMPMI 75x75 and 100x100mm VESA mounts.



## Complies with Kensington Security Slot

A slot compliant with Kensington Security Slot is built-in to the rear bottom corner of the UH1560.



## Optional Accessories for Wide Range of Applications

The additional U-type stand, attachable sunshade and 19-inch rack mount (6U) brackets are available to meet the wide range of applications.



### ■ V-Mount Battery Plate

An optional V-Mount Battery Plate is attachable directly to the back of the UH1560. The V-Mount Battery Plate comes with mini 4pin XLR connector cable.

Model No.: UH15-VMP



### ■ Brackets for 19-inch EIA Rack

An optional EIA bracket, UH15-BRK is available for mounting the UH1560 on 19-inch EIA Rack. The UH1560 fits to the rack with the height of below 6U.

Model No.: UH15-BRK



## Specifications

Model No.	UH1560	
Color	Black	
Display	Size	15.6"
	Panel Type	IPS
	Resolution	3840x2160
	Brightness	330 cd/m2
	Contrast Ratio	1000:1
	View Angle	176°(V) / 176°(H)
Input	HDMI 2.0 x 2 (HDCP 2.2 and 1.4) /	
	HDMI 1.4 x 2 (HDCP 1.4) /	
	DisplayPort 1.2 x 1 / VGA x 1	
Output	3.5mmΦ Phone Jack	
Speaker	2W x 2	
VESA (FPMPI)	75 x 75 mm / 100 x 100 mm	
Power	DC10 ~ 24V / mini 4 pin XLR	
Power Consumption	17W	
Operating Temperature	0 ~ 50°C	
Storage Temperature	-20 ~ 65°C	
Dimensions	383mm x 239mm x 36mm (excluding stand)	
Weight	1,360g (exlcuding stand)	
Package Contents	Remote Controller and AC Adaptor	


※HDMI, HDMI logo, or High-Definition Multimedia Interface, are trademarks or registered trademarks of HDMI Licensing LLC.  
 ※Due to product improvements, specifications are subject to change without notice.  
 ※Compatibility with ALL devices not guaranteed.

## Options

### ■ Sunshade

An optional big attachable sunshade is ideal for outdoor use that prevents external light from entering the monitor screen, allowing you to see the LCD screen clearly without glare.

Model No.: UH15-SUS



### ■ U-Type Stand

The UH1560 is also mountable on the optional U-Type Stand using 1/4-inch mounting thread holes. The stand enables to tilt and hold the monitor with an ideal position angle.

Model No.: UH15-STD



The latest information and the detailed product specifications are available at [www.ad-techno.com/en/](http://www.ad-techno.com/en/)

Copyright (c) ADTECHNO Inc. All rights reserved."ADTECHNO" and the ADTECHNO logo are registered trademarks of ADTECHNO Inc. All other brand names and trademarks or registered trademarks are the property of their respective owners. Pricing, specifications and availability subject to change without notice. Actual products, product images, and online product images may vary from images shown here. Not responsible for typographical errors.

**ADTECHNO**

3F., 3-29, Ichigayahonmuracho, Shinjyuku-Ku, Tokyo 162-0845 Japan  
 TEL: +81 3 5206 3330 FAX: +81 3 5206 3339

Osaka Branch  
 7F., Fukushima Bldg., 5-13-18 Fukushima, Fukushima-Ku, Osaka 553-0003, Japan  
 TEL: +81 6 6451 0050

Taiwan Branch / Factory  
 3/4F., No.268, Liancheng Rd., Zhonghe Dist., New Taipei City 23553, Taiwan  
 TEL: +886 8227 9136 FAX: +886 2 8227 9186