



VZ-156PM-4K is a 15.6" 4K(3840x2160) monitor with 3G-SDI interface - 2x3G-SDI & 4xHDMI. VZ-156PM-4K provides **HDR**, **3D LUT** and **color space** (Native. Rec. 709 & User).

VZ-156PM-4K ADVANTAGES

- 4K (3840*2160) Ultra-HD native resolution
- HDR (HDMI) / 3D-LUT / Loop-Through (SDI)
- Time-Code / Aspect Ratio / Quad View / Tally (D-Sub 9pin) / Freeze
- Underscan / Pixel to Pixel / Exposure / Histogram / Check Field



A specific calibration to reproduce the colors of the image color space. Color calibration supports the PRO/LTE version of LightSpace CMS by Light Illusion.



Wide color gamut range to make precise color reproduction of Rec. 709 color space with built-in 3D Lut, featuring 3 user logs



3-Gbps (3G)-SDI, Automatically adapts to SMPTE and ITU digital video standards for 3G-SDI, HD-SDI, and SDI



VZ-156PM-4K has a various of mounting methods for broadcast, on-site monitoring and live broadcast car. As well as setup a video wall of rack monitors in control room and see all the scenes. A 6U rack for a customized monitoring solution also can be supported for viewing from different angles and image displays.



VZ-156PM-4K supports quad view mode which source came from input signals such as SDI, HDMI, DVI & VGA

MODEL #		VZ-156PM-4K
DISPLAY		
Screen Size	15.6"	
Max. Resolution	3840 x 2160 (4K) IPS pixel	
Pixel Pitch	0.08970 mm x 0.08970 mm	
Brightness	330 cd/m ² (Typical)	
Contrast Ratio	1000 : 1	
Aspect Ratio	16 : 9	
Viewing Angle (H/V)	176° / 176°	
Color Depth	16.7 M	
INTERFACE		
3G SDI In / Out	1 / 1 (Loopthrough)	
HDMI 2.0 / 1.4 In	1 (4K@60Hz) / 3 (4K@30Hz)	
DVI In	1	
VGA In	1	
USB	1 (3D LUT)	
Audio	2 (L/R)	
Tally	1	
AUDIO		
Built in speaker	1W x 2	
Ear Jack	3.5 mm	
Input Format		
SDI	SMPTE-125M	480i (59.94)
	SMPTE-274M	1080i (60/59.94/50)
		1080p (30/29.97/25/24/24sF/23.98/23.98sF)
	SMPTE-292M	1080p (30/29.97/25/24/24sF/23.98/23.98sF)
	SMPTE-296M	720p (60/59.94/50/30/29/25/24/23.98)
		720p (60/59.94/50)
	SMPTE-372M	1080i (29.97/25/24/23.98)
		1080p (60/59.94/50/30/29.97/25/24/23.98)
	SMPTE-425M	1080p (60/59.94/50)
	ITU-R BT.656	576i (50)
HDMI	4K	4096x2160 / 3840x2160 / 1080p, 1080i,
		720p, 720i, 480p

- False Color / Color Temperature / Color space
- Audio Level Meter / Audio Channel Output 2ch (out of 16ch)
- Front User definable button F1 to F4
- Display Flip / Mirror / Various Markers / Peaking


DIMENSIONS		
Outline Dimension	(W x H x D) (inch)	15.32 x 10.51 x 1.49"
	(W x H x D) (mm)	389 x 267 x 38 mm
Net / Gross(with Case) Weight	6.39 lbs (3.4 kg) / 26.45 lbs (12 kg)	
AUDIO		
Built in speaker	1W x 2	
GENERAL		
Power	Electrical Ratings	XLR-4p (DC 12~24V), 2.7A (15V)
	Consumption	≤ 18 W
Warranty	2 Years	
Operating Temperature	32 ~ 140°F / 0 ~ 60°C	
Humidity at High Operating Temperature	90% RH	
Storage Temperature	-4 ~ 140°F / -20 ~ 60°C	
Battery Plate	V-mount / Anton Bauer mount	
Package Include	15V DC Adapter x 1, Tally Connector x 1, Manual x 1, Aluminium Carrying Case x 1, Field Hood x 1, Battery Bracket (V-Mount) x 1, Desktop Stand Set x 1, V-mount or Anton Bauer mount Power cable x 1, V-mount or Anton Bauer mount x 1, Adapter Fixing Belt x 1	

Contact ViewZ


- Address : 177 W. Orangethorpe Ave., Placentia, CA 92870
- Phone : (714)996-1177, Fax : (714)996-1138
- Sales : sales@viewzusa.com

* Design and specifications are subject to change without notice.

DIMENSIONS

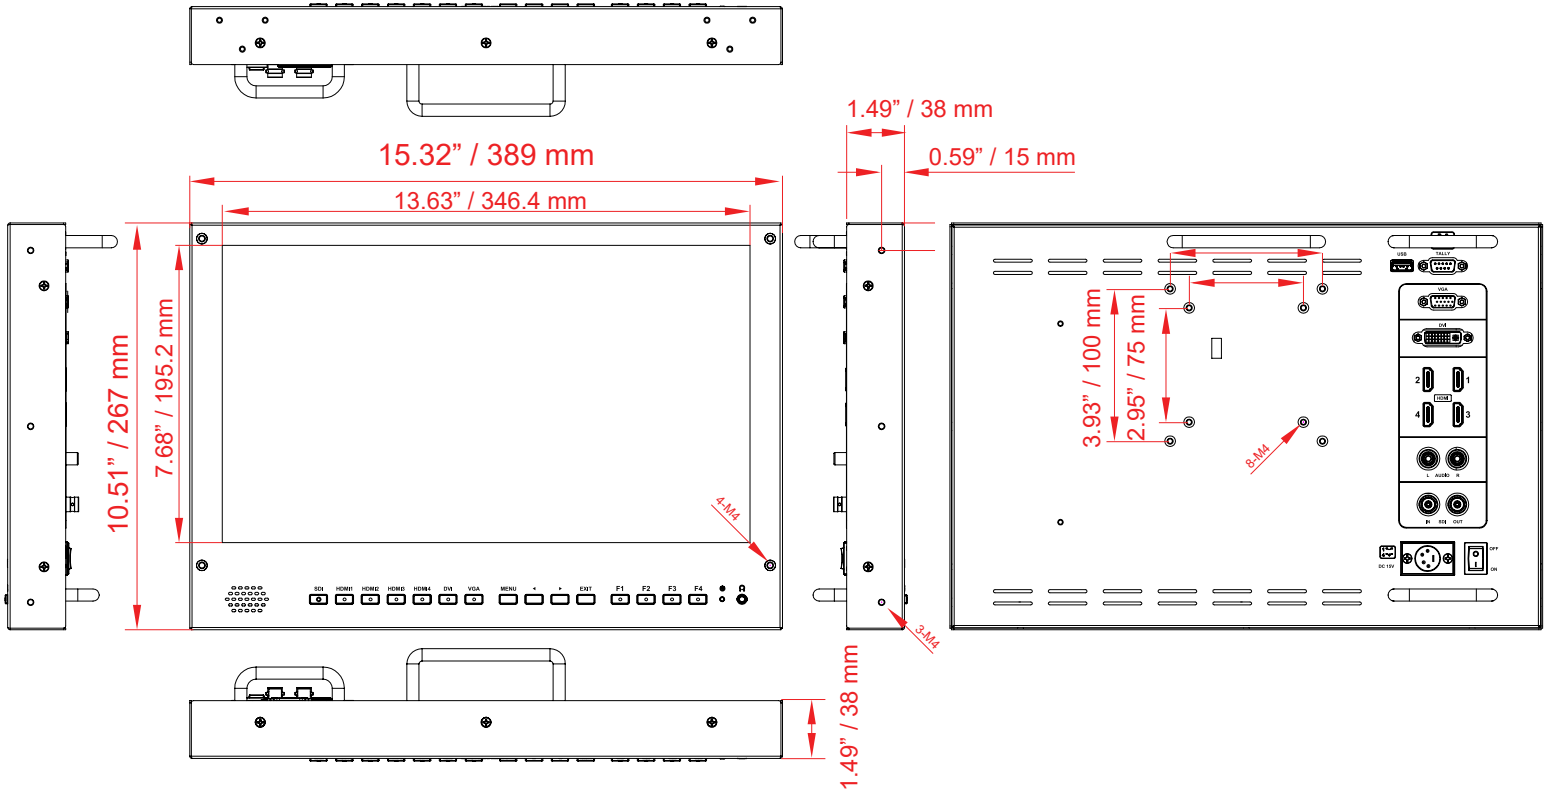

INTERFACE

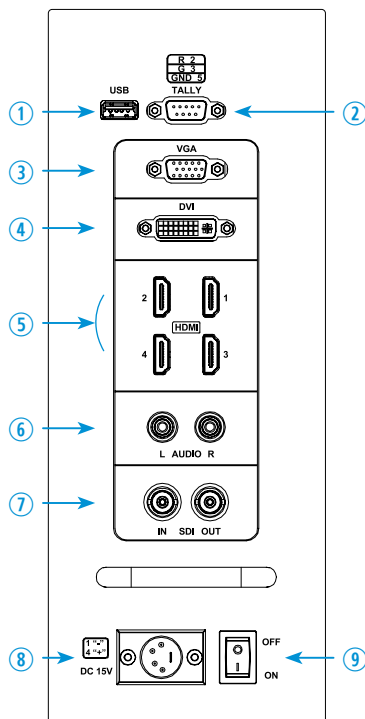

1. USB In
2. TALLY
3. VGA IN
4. DVI IN
5. HDMI IN
6. AUDIO IN / OUT
7. 3G-SDI IN / Out
8. DC XLR 12V In
9. On-Off Switch

Contact ViewZ

- Address : 177 W. Orangethorpe Ave., Placentia, CA 92870
- Phone : (714)996-1177, Fax : (714)996-1138
- Sales : sales@viewzusa.com