

# ez-Distributor

NEW


## 12 x 3G SDI and 2 x HDMI OUT

### Distribution Amplifier with Audio Mux/ Demux

LCD Monitoring and Audio Level in 2.7 inch TFT LCD.  
The LCD screen and the audio bar are extra features to facilitate monitoring of the video in 1 RU size.

### Audio Embed & De-Embed

If you wish to add an external audio being distributed, don't worry. ez-Distributor, has a pair of XLR port for you to input a different audio. You can also take the sound out of the video.

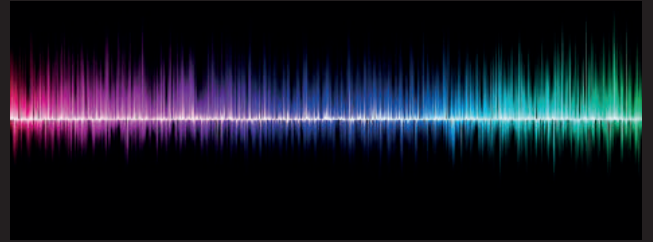

#### ① LCD Display

- Input video display (SDI or HDMI)
- Audio Level Meter Display
- Input Video Resolution Display

#### ② Menu buttons setting

- Video input
- Audio input
- Audio gain
- S/W version

#### ③ AC Power On/Off switch



#### ③ AC POWER

#### ④ Analog Audio In

#### ⑤ Analog Audio Out

#### ⑥ HDMI IN

#### ⑦ USB2.0

#### ⑧ SDI IN

#### ⑨ HDMI OUT

#### ⑩ SDI OUT

③ **AC Power** : AC Power (100 -240V, 50/60Hz)

④ **ANALOG AUDIO IN** : XLR(Female) x 2

⑤ **ANALOG AUDIO OUT** : XLR(Male) x 2

⑥ **HDMI IN** : SD/HD/3G (HDMI Type A) x 1

⑦ **USB2.0** : Update (Micro USB Type)

⑧ **SDI IN** : SD/HD/3G-SDI (BNC 75Ohm) x 12

⑨ **HDMI OUT** : SD/HD/3G (HDMI Type A) x 2

⑩ **SDI OUT** : SD/HD/3G-SDI (BNC 75Ohm) x 12

gs@lumantek.com  
www.lumantek.com

**LUMANTEK**

# ez-Distributor

NEW

## System Specifications

### Data Input

---

SDI Video Input: SD/HD/3G-SDI (BNC 75Ω) x1  
HDMI Video Input: SD/HD/3G (HDMI Type A) x1

### Video Formats

---

- 720x480i@59.94/60
- 720x576i@50
- 1280x720p@50/59.94/60
- 1920x1080i@50/59.94/60
- 1920x1080p@23.94/24/25/29.97/30
- 1920x1080p@50/59.94/60

### Audio Input

---

XLR (Female) x2

### Data Output

---

SDI Video Output: SD/HD/3G-SDI (BNC 75Ω) x12  
HDMI Video Output: SD/HD/3G (HDMI Type A) x2

### Video Formats

---

- 720x480i@59.94/60
- 720x576i@50
- 1280x720p@50/59.94/60
- 1920x1080i@50/59.94/60
- 1920x1080p@23.94/24/25/29.97/30
- 1920x1080p@50/59.94/60

### Audio Output

---

XLR (Male) x2

### Connections

---

Update : Debug (Micro-USB)x1

### Display

---

2.7 inch TFT LCD : Input Video Display(SDI or HDMI),  
AUDIO Level Meter Display, Input Video Resolution  
Display

### Electrical

---

Power Input: 100~240VAC @ 50/60Hz  
Power Consumption: 10W(max.)  
Operation Temperature: 0~45 C °

### Physical

---

Dimension: 44(H) X 478(W) X 226(D)  
Weight: 3 kg

gs@lumantek.com  
www.lumantek.com

**LUMANTEK**