

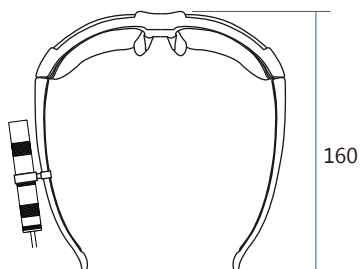


**R12000C**  
Glasses camera kit



Unit: ±0.5mm



**Connector Options**



USB A type



Micro USB Type B



USB type C



Mini USB Type B

**Specification**

Model	R12000C-3.0
Frame Rate (Max.)	1920 x 1080 @ 30fps H.264, MJPEG / 5fps YUV 1280 x 720 @ 30fps H.264, MJPEG / 10fps YUV 640 x 480 640 x 360 320 x 240 320 x 180 @ 30fps H.264, MJPEG, YUV
Pixel Size (mm)	3 x 3
Image Sensor	1/2.7" Digital CMOS Camera Module
Image Area (mm)	5856 x 3726
Scan Mode	Progressive
Sensitivity	3300 mV/Lux-sec
Dynamic Range	69 dB @ 8x gain
Storage Temperature	-30 to 60 Degree C
Working Temperature	-10 to 45 Degree C
Lens	3.0 mm / F 2.0
Interface	USB 2.0 (Compliant with USB Video Class 1.1 standard)
Output Format	YUV / MJPEG / H.264
Operating System	Windows 7, Windows 8, Windows 10, Linux OS (kernel 2.6.27 or later ), Android OS
Power Source	DC 5V (USB)
Dimensions (mm)	350 mA

**Other information**



MP-WF580K  
(WiFi DVR)



**MD-R12000C-3.0**

SERIES	CONNECTOR	CAMERA BODY	FRAME	DISPLAY	GLASSES	LENS
<b>M</b> Basic	<b>D</b> USB 2.0 Type A <b>M</b> USB 2.0 Micro Type B (OTG) <b>T</b> USB 2.0 Type C <b>I</b> Mini USB Type B	<b>R</b> Glasses Camera Kit	<b>1</b> Black	<b>2000</b> Color	<b>B</b> Black Tint <b>C</b> Transparent <b>U</b> UV Protection	<b>3.0</b> 3.0 mm / F 2.0