



**Feature**

- 4 White SMD LED Lighting
- Multiple applications
- High performance.

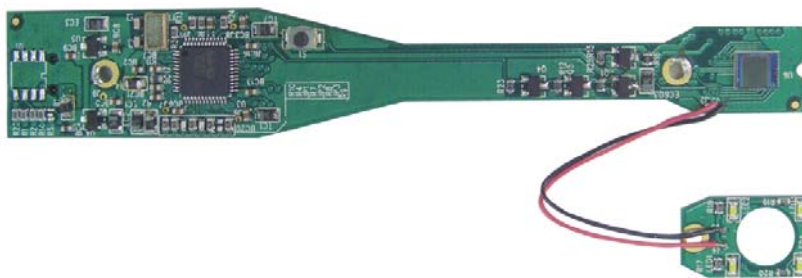

**MD-MB4013-3S**  
3.4 mm / F 7.0 (M5.5) Lens

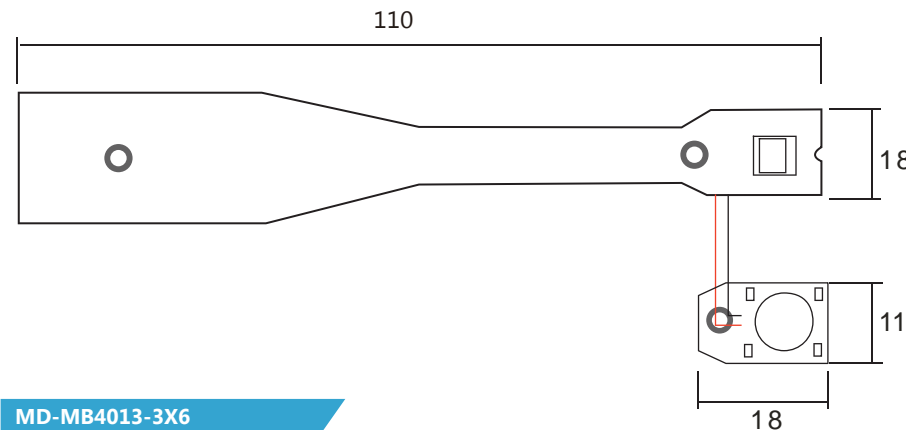



**MD-MB4013-3X6**  
3.4 mm / F 5.7 (M6) Lens



**Specification**

Model	MD-MB4013	
Image Transfer Rate	SXGA 15fps VGA 30fps QVGA, QQVGA, CIF 30fps QCIF, QQCIF 30fps	
Image sensor	1/4" CMOS color	
Lens (Specify when ordering)	3S	3.4 mm / F 7.0 (M 5.5)
	3X6	3.4 mm / F 5.7 (M 6)
	3Z	3.4 mm / F 7.0 (M 5.5)
	4H	4.5 mm / F 2.8 (M 7)
Video Format	(8-bit) YUV/YCbCr 4:2:2 GRB 4:2:2 Raw RGB Data	
LED	White SMD LED Lighting x 4 IR LED (Specify when ordering)	
Power Source	DC 5V	
Power Current	80mA	
OS Support	Windows 2000, XP, Windows 7 or windows 10	
Dimensions (mm)	18 x 110	

**MD-MB4013-3S**

SERIES	CONNECTOR	CAMERA BODY	DISPLAY	LENS
<b>M</b> Basic	<b>UVC Signal</b> <b>D</b> USB Type A <b>M</b> USB Micro Type B (OTG) <b>T</b> USB Type C <b>I</b> USB Mini Type B	<b>Front View</b> <b>MB</b> Board type	<b>Board Type</b> <b>4013</b> Color	<b>3S</b> 3.4 mm / F 7.0 (M 5.5) <b>3X6</b> 3.4 mm / F 5.7 (M 6) <b>3Z</b> 3.4 mm / F 7.0 (M 5) <b>4H</b> 4.5 mm / F 2.8 (M 7) <b>N/A</b> None
				 3Z  4H

**Connector Information**

