

# AVIP-S4601E

UHD+ H.264/H.265 Live Video Recorder/Streamer




AVIP-S4601E makes online broadcasting of live video, with a locally stored achieve, an easy and simple process. Video content up to 4K60 4:4:4 is supported and can be output up to 4K60 for a better quality for streaming. An HDMI output is provided for local monitoring of the selected input source. The video may also be recorded locally to a local network drive (via USB) or NAS(NFS/CIFS).

## PANELS



## DIAGRAM

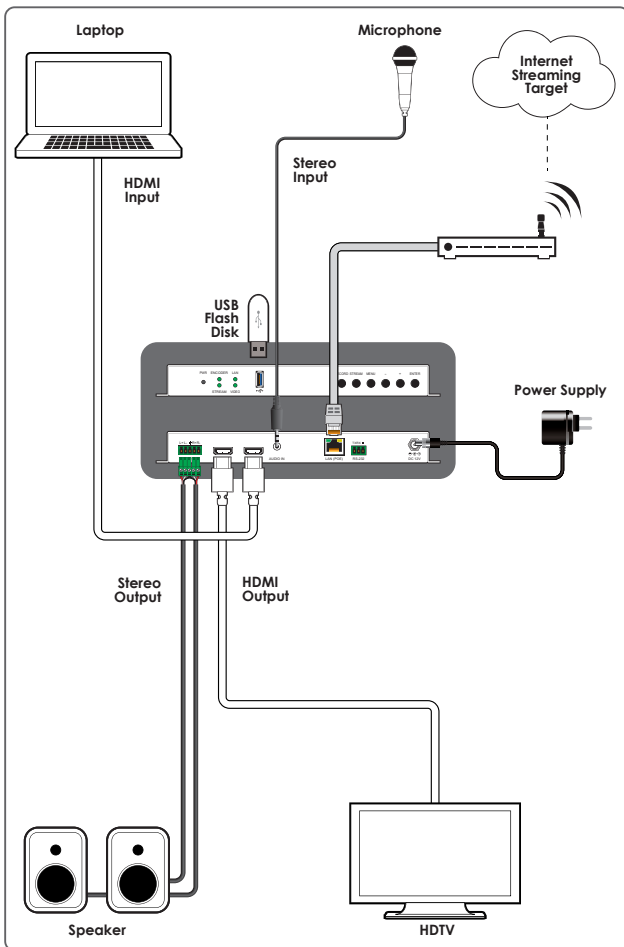

## FEATURES

- Integrated support for live streaming to Facebook, YouTube or Twitch channels
- Generated 3 simultaneous streams from the same video source (up to 1080P60fps) for easy system integration at multiple bandwidth targets.
- Control via front panel buttons, WebGUI, Telnet, RS-232, IR.

## SPECIFICATIONS

### Interfaces

<b>Input Port</b>	1 HDMI (Type-A) 1 Analog Stereo (3.5mm)
<b>Output Port</b>	1 HDMI (Type-A) 1 Balance Audio (5 pin Terminal block) 1 USB2.0 (Type-A)
<b>Bi-directional Port</b>	1 GbE LAN (RJ-45)
<b>Control I/O</b>	1 RS-232 (DB-9)

### Video

<b>HDMI Compliance</b>	HDMI 2.0 (DVI 1.0)	
<b>Input Signal Type</b>	4K@60 YUV 4:4:4	
<b>Output Signal Type</b>	4K@60 YUV 4:4:4	
	<b>Resolutions</b>	
<b>Maximum Input</b>	HDMI	3840×2160p@60 YUV 4:4:4
<b>Maximum Output</b>	LAN (Streaming)	3840×2160p@60
	HDMI	3840×2160p@60 YUV 4:4:4

### Audio

<b>HDMI</b>	LPCM (2 Channels)	
<b>Line In</b>	2 Vrms S/N Ratio: > 80dB (1kHz with 0dBFS)	
<b>Line Out</b>	2 Vrms S/N Ratio: > 80dB (1kHz with 0dBFS)	

### Power

<b>Power Supply</b>	12V/3A DC (Locking)
<b>Power Consumption</b>	10.45W

### Enclosure

<b>Chassis Material</b>	Metal (Steel)
<b>Chassis Color</b>	Black
<b>Dimensions (W×H×D)</b>	231mm×116mm×25mm [Case Only] 232mm×117mm×25mm [All Inclusive]
<b>Weight</b>	660g

### Field Firmware Update

WebGUI, USB Flash Drive

## ORDERING INFORMATION

Model No.	Product Description
<b>AVIP-S4601E</b>	UHD+ H.264/H.265 Live Video Recorder/Streamer
<b>ADP-056SWE6210C</b>	Power Supplier(12V, 3A)