

# WAT-240E/CB (G3.8) 1/4" Miniature Camera


Compact cylindrical camera with Built-in lens & BNC output



## Key features

- Resolution of 480TVL
- Versatile use for limited space, general surveillance, embedded system and part of image processing system
- Various Optional M12 lenses available ※Glass lenses and pinhole lens are not interchangeable

## Dimensions

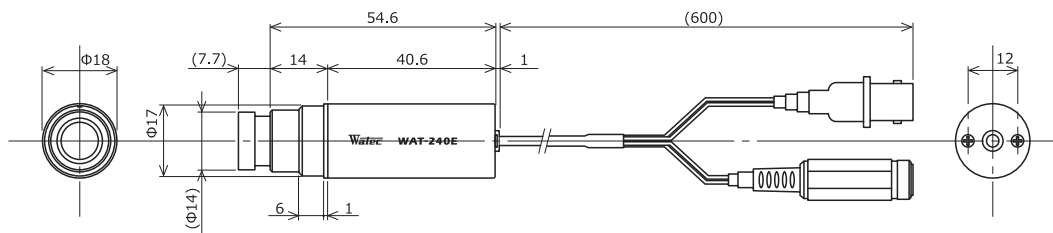


## Specifications

		NTSC	PAL
Video standard		NTSC	PAL
Pick-up element		1/4 inch CMOS image sensor	
Number of effective pixels		648(H) × 488(V)	
Unit cell size		5.6μm(H) × 5.6μm(V)	
Imaging system		RGB primary color bayer arrangement mosaic filters on chip	
Synchronizing system		Internal	
Scanning system		Progressive	
Video output		Composite: 1.0 V(p-p) 75Ω (Unbalanced)	
Resolution (H)		More than 480TVL (Center)	
Minimum illumination		0.3 lx F2.0 (AGC ON=42dB, Shutter=OFF)	
S/N		More than 52dB (AGC OFF=0dB, γ=1.0)	
Function settings		-	
AE mode	Fixed	-	
	EI	1/60 - 1/100000 sec.	1/50 - 1/100000 sec.
White balance		ATW	
AGC	ON	0 - 42dB	
	OFF	-	
MGC		-	
Day/Night		-	
Gamma characteristics		γ=0.45	
Video level		85IRE	
Noise reduction		-	
Wide dynamic range		-	
Lens iris		-	
Back light compensation		BLC	
White blemish correction		-	
Sharpness		-	
Defog		-	
Digital zoom		-	
Privacy mask		-	
Mirror image		-	
Freeze		-	
Motion detection		-	
Neg.image		-	
Interface		BNC (Composite Video), Power in	
Power supply		DC+5V - 6V	
Power consumption		0.66W/110mA (DC+6V)	
Operating temperature		-10 - +50°C	
Storage temperature		-30 - +70°C	
Operating / Storage humidity		95% RH or less (Without condensation)	
Lens mount		M12 P=0.5	
Standard lens		3820BC-12 (f3.8 F2.0)	
Cable length		600mm	
Weight		Approx. 33g	
Accessories		Ring holder	


Accessories Options

- Miniature lenses
- 2520BC-12
  - 2920BC-12
  - 3820BC-12 (Standard)
  - 0625BC-12
  - 0820BC-12
  - 1220BC-12
  - M1625BC-12
  - 2540EX014-M12


**WAT-240E/CB (G3.8)**

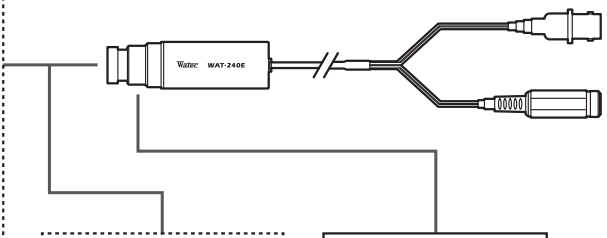

- Extenders
- EX005-M12-2
  - EX010-M12-2



- Holder
- H002



VIDEO OUT (BNC)

POWER IN (DC5-6V)

- Cables
- 1.5C2V (BNC/BNC)
  - 3C2V (BNC/BNC)
  - 3C2V (BNC/RCA)

- Power supply adaptors
- SWI6-5.9-N-P13
  - SWI6-5.9-E-P13

VIDEO OUT (BNC)

VIDEO OUT (RCA)



※Not in our lineup