


# Main specifications of LiveShell X

specification



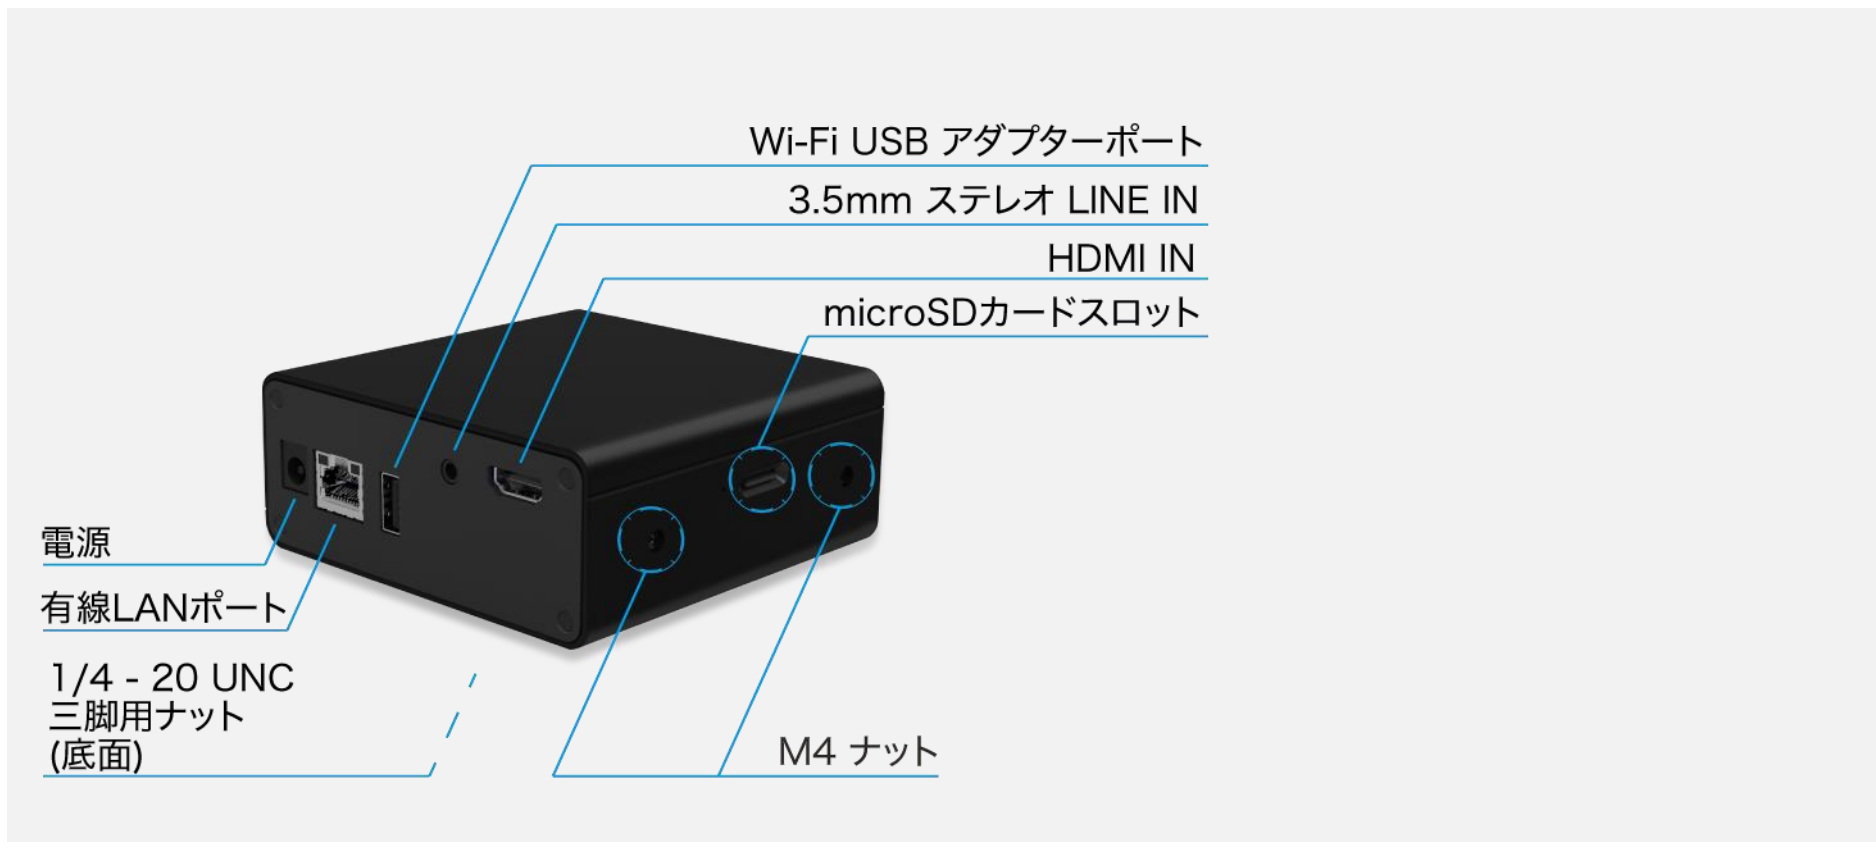

Maximum resolution for live streaming	1080/60p (only for 1 delivery or 1 recording)
Video compression method	H.265/H.264
Audio compression method	AAC-LC

bit rate	100kbps to 20Mbps
audio bitrate	Up to 255kbps
Simultaneous delivery	Up to 3 (streaming and recording total) (+ monitoring 1)
recording media	microSD card (SDXC compatible)
recording resolution	Up to 1080/60p (when recording 1)
telop	correspondence
transparent telop	correspondence
Internet connection	<p>Wired LAN (10BASE-T/100BASE-TX)</p> <p>Wireless LAN (IEEE 802.11a/b/g/n/ac)</p> <p>3G/LTE (Optional 3G/ <b>LTE modem</b> is required)</p> <p>* Please see <a href="#">the support page for compatible modems</a></p>
video input	HDMI
input resolution	HDMI (1080p/60(59.94), 1080p/50, 1080p/30(29.97), 1080p/25, 1080p/24(23.976), 1080i/60(59.94), 1080i/50, 720p/60(59.94), 720p /50, 720p/30(29.97), 720p/25, 720p/24(23.976), 576p, 576i, 480p, 480i, VGA)*1

Voice input	HDMI-IN, stereo LINE-IN
Supported protocol	RTMP client, RTSP server
power supply	AC adapter or dedicated rechargeable battery (included)
Continuous drive time (when powered by battery)	up to 6 hours
Battery replacement/battery charging	Replaceable / Rechargeable
accessories	<ul style="list-style-type: none"> <li>• Wireless LAN adapter x 1</li> <li>• Dedicated AC adapter x 1</li> <li>  *A type (for Japan/US) / C type (for Europe) / BF type (for UK) Cable x 1 each</li> <li>• Setting cable x 1</li> <li>• LiveShell X Quick Setup Guide ×1</li> </ul>
body size	W: 102 mm x D: 100 mm x H: 42 mm ( <a href="#">Outline drawing</a> )
weight	380g without internal battery, 480g with internal battery

\*1 HDCP is not supported.