



10.1 inch Full HD LCD Monitor

- ◆ Full HD signal pixel-to-pixel display
- ◆ 178° wide viewing angle
- ◆ Calibration of brightness, gray level, color temperature and color space
- ◆ Supports color gamuts that compliant to SMPTE-C, EBU and ITU-709 standards
- ◆ 12bit accuracy signal processing, quick response with no motion blur
- ◆ Dual-screen display
- ◆ Built-in waveform/vector monitoring
- ◆ Various marker settings: Aspect marker, safety area marker and center marker
- ◆ AFD function
- ◆ TC code display (VITC, LTC, D-VITC)
- ◆ Ethernet control and firmware update
- ◆ Focus Assist
- ◆ Luma Zone

Overview

RMM1024 is a 10.1" dual-screen 4RU full HD LCD monitor. It features 1920x1200 resolution, wide viewing angle and wide color space panel. It has analog composite, 3G/HD/SD-SDI and HDMI video interfaces and analog audio input/output connectors. The precise color correction, audio meter display and waveform & vector display make the RMM1024 the first choice for the OB Van and EFP system.

Specifications


Model	RMM1024
Number of Screen	2
Display Area	10.1" diagonal
Resolution	1920x1200
Color Depth	16.7M
Viewing Angle (HxV)	178°x178°
Brightness (cd/m ²)	400
Contrast Ratio	800:1
Operating Temperature	0°C to 35°C (32°F to 95°F)
Weight	3kg (6.6lbs)
Power Consumption	30W
Input Signal (single screen)	Analog Composite (BNCx2), 3G/HD/SD-SDI (BNCx2), HDMI(HDMI Type A), Analog Stereo(RCAx4)
Output Signal (single screen)	3G/HD/SD-SDI (BNCx2), Analog Stereo(RCAx2)
Accessories	Power Cord/Adapter (DC12V/5A)

Specifications are subject to change without notice.


Signal Format

	SDI	VIDEO	HDMI
PAL		○	
NTSC		○	
480I60/59.94	○		○
576I50	○		○
480P60/59.94			○
576P50			○
720P24/23.97	○		○
720P25	○		○
720P30/29.97	○		○
720P50	○		○
720P60/59.94	○		○
1080SF24/23.97	○		○
1035I60/59.94	○		○
1080I50	○		○
1080I60/59.94	○		○
1080P24/23.97	○		○
1080P25	○		○
1080P30/29.97	○		○
1080P50	○		○
1080P60/59.94	○		○
VGA(640X480)			○
SVGA(800X600)			○
XGA(1024X768)			○
SXGA(1280X1024)			○
WXGA(1360X768)			○
WXGA+(1440X900)			○
WXGA+(1400X1050)			○
UXGA(1600X1200)			○
UXGA+(1680X1050)			○
WUXGA(1920X1080)			○
WUXGA(1920X1200)			○

Dimensions

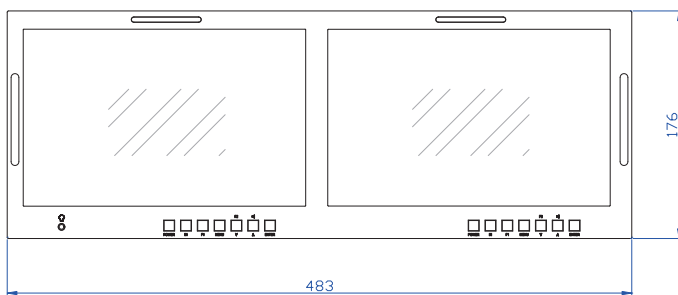

Main Body: 483x176x60.2 (mm)
19x6.9x2.37 (inch)

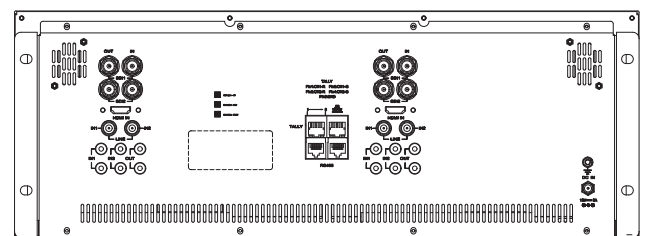

OSEE TECHNOLOGY CO., LTD.

Add: No.22 Building, No.68 Zone, Beiqing Road, Haidian District, Beijing 100094 China
Tel: +8610 6243 4168-8017 **Fax:** +8610 6243 4169
E-mail: sales@osee-dig.com

OSEE AMERICAS LTD.

Add: 43218 Christy St Fremont, CA 94538
Tel: +1 510 996 4499 **E-mail:** info@oseeamerica.com
Toll Free: 866 625 6106 **Online Mall:** www.oseedirect.com