


Analog Camera

KPC-C190xUB/UWX


- 1/3.2" 1.3M SONY STARVIS CMOS
- Horizontal 800TV Lines
- CVBS(1.0Vp-p Composite 75Ω)
- Fixed lens 3.6mm
- WDR, 2DNR
- Digital D&N
- Mini Bullet Camera

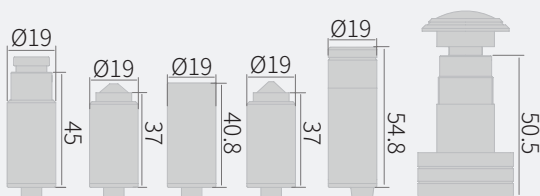

IP Camera

KPC-C190xUB/UWX

Dimensions

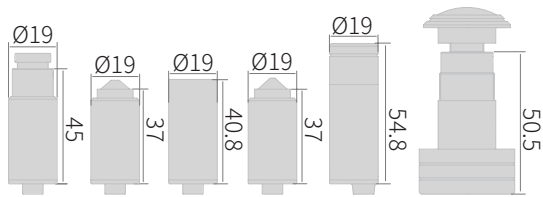

Specifications

	KPC-C190xUB	KPC-C190xUWX		
Image Sensor	1/3.2" Exmor RS Progressive Scan SONY STARVIS CMOS		Privacy Mask	-
Effective Pixels	1.27MP 1297(H) x 977(V)		Image Rotation	OFF, H-FLIP, V-FLIP, HV-FLIP
Max. Video Resolution	Horizontal 800TV Lines		Defog	OFF, AUTO
Type	Board mount lens		Sharpness	0-255
Lens Focal Length	3.6mm, F 2.0		OSD control	-
Angle of View	94.91 (D)x81.9 (H)x66.5 (V)		Language	-
Min.Illumination	0.2 Lux (30IRE, F2.0, AGC MAX)		Video Output mode	CVBS(1.0Vp-p Composite 75Ω) NTSC/PAL
Gamma	γ=0.45		General	
IR LEDs	-		IP Rating	- IP67 (Waterproof Type)
IR Range	-		Operating Temperature	-10°C~+50°C(Humidity less than 80%)
White Balance	ATW / PUSH / USER1 / USER2 / MANUAL / PUSH LOCK		Storage Temperature	-20°C~+60°C(Humidity less than 80%)
Dynamic Range	WDR/BLC	WDR / ATR / OFF	Dimension(mm)	Φ19X54.8mm (Waterproof type)
	D-WDR	OFF / HLC / BLC	Weight	Approx.44.7g (Waterproof type)
	Level	138.1dB	Power Source	12VDC(±10%)
Electronic Shutter Speed	1/60(50)~1/100,000		Power Consumption	12VDC(±10%), 60mA max.
Digital Slow Shutter(DSS)	-		Option	
Auto Gain Control(AGC)	MIN, 6, 12, 18, 24, 30, 36, 42, 48, MAX		Power Source	-
Day&Night	Electronic D&N		Power Consumption	-
Noise Deduction	2D-DNR (Y/C, Y, C, OFF)		Lens	KPC-C190xUP3: 3.7mm Flat Pinhole Lens
Motion Detection	-			